





HOSE REEL DOUBLE SWING



MODEL	Drum Capacity	Dim A	Dim B	Dim C	Dim D
HR 501-BS-1	ø 3/4" x 30 m BS 5274 Hose	535	340	575	600
HR 501-EN-2	ø 3/4" x 30 m BS 671 Hose	535	340	575	600
HR 501-BS-3	ø 1" x 30 m BS 5274 Hose	535	340	575	600
HR 501-EN	ø 1" x 30 m BS 671 Hose	535	340	575	600


SPECIFICATIONS

Drum : Galvanised Mild Steel
 Water Way : Light Alloy
 Finishing : Red Epoxy Polyester
 Electrostatic Powder Coating



HYDRANT PILLAR

MODEL H - 14 AP - Two way
 - With main valve
 - With ball valve
 - Size : 4" X 2 1/2" X 2 1/2"

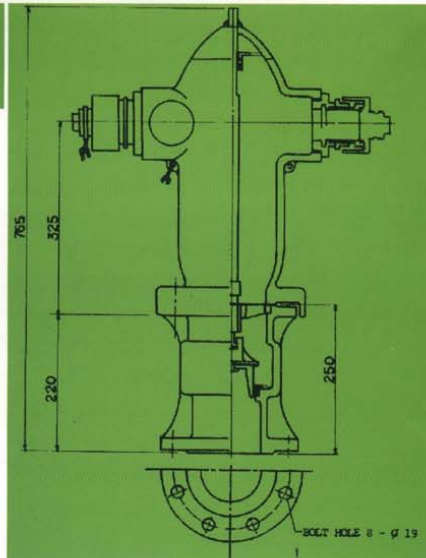


WORKING PRESSURE max 10 bar
 HYDRAULIC PRESSURE 20 bar

PAINTING
 INSIDE MIL - C - 450 A
 ASPHALT VARNISH 2 coats

EXTERIOR
 UNDERCOAT TT - P - 86 red read
 anticorrosive paint
 FINISH COAT, Phthalic resin coating

Model H - 13AP - One Way
 Size 3" X 2,5"

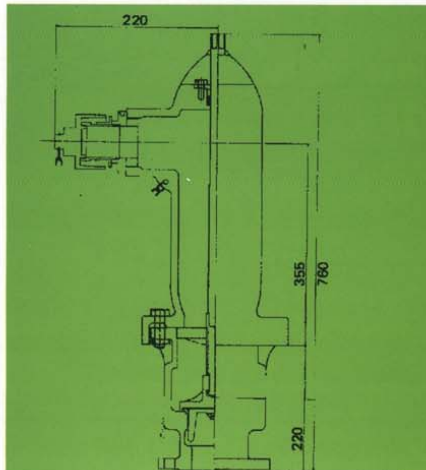

WORKING PRESSURE max 10 bar
 HYDRAULIC PRESSURE 20 bar

PAINTING
 INSIDE MIL - C - 450 A
 ASPHALT VARNISH 2 coats

EXTERIOR
 UNDERCOAT TT - P - 86 red read
 anticorrosive paint
 FINISH COAT, Phthalic resin coating